

# SCREEN DRYING CABINETS

## DRI-VAULT

Dry your screens securely in the 10 or 24 screen Dri-Vault. Variable heat and powerful filtered air flow can have your screens ready for exposure, in as little as **20 MINUTES! \*\***



- RELIABLE** 3 Year Warranty
- HEAVY DUTY** Industrial stainless steel finned heater(s)
- CAPACITY** Holds ten (10) or twenty four (24) 25" x 36" (63.6 x 91.4 cm) screens of any type
- POWERFUL** One (1) 200 CFM (5.7 CMM) air flow blower or Two (2) 290 CFM (14.2 CMM) air flow blowers
- CONSISTENT** Pressurized cabin with positive air flow keeps out contaminants even if an air leak occurs
- EFFECTIVE** Screens sit horizontal on removable shelves (angled to provide edge contact only)
- SECURE** One (1) sealed latching door 10 screen or two (2) individually sealed latching doors on the 24 screen unit
- CONTROL** 10 screen cabinet has Hi-Low heat adjustment OR the 24 screen cabinet has breaker on/off switch, pilot light, digital temperature control, both have ability to run air only or variable heat.
- FAST** Dries emulsion as quickly as 20 minutes\*\*
- EFFICIENT** 4" (10 cm) exhaust duct for contaminated air removal
- PRECISE** Light tight heavy duty double wall
- EASY** Simple to clean or replace filtered air intake

VDC-253624 \$3,740\*

24 Screen Drying Cabinet



### Options

- Stainless steel shelves for rustproof drying
- Casters (standard on 24 screen cabinet)
- 240 Volt (standard on 24 screen cabinet)
- Expanded Depth for MHM style screens with pins (24 screen cabinet)
- Digital Temperature Controller for 10 screen Dri-Vaults

E2331 exposure unit fits perfectly on top of 10 screen drying cabinet. Foot p/n 08-08-018 required




**NEW LARGER SIZE!**

VDC-253610 \$1,750\*  
10 Screen Drying Cabinet

**3 YEAR WARRANTY**

Dynamic Air Flow above and below the screens ensures consistent & even drying.



\*Starting List Price (USD). Price does NOT include crating and shipping charges. 6% sales tax will be added for PA billing addresses. Prices subject to change without notice.


\*\*Drying times will vary. Humidity, thickness and type of emulsion used, and size of screens are factors in Dri-Vault curing time.



# Dri-Vault Drying Cabinets Technical Specifications

Ever wonder why you have pinholes or debris in the emulsion on your screens? Have multiple jobs to do but are wasting time waiting for your screens to dry? Is your emulsion activating before you even get to burn your screens? If so, you need the Dri-Vault!

The Dri-Vault provides a safe environment to, not only dry your screens in a timely fashion, but it's powerful pressurized air flow system keeps contaminants off your screens and the double-wall sealed environment prevents UV light from leaking in and activating your emulsion.

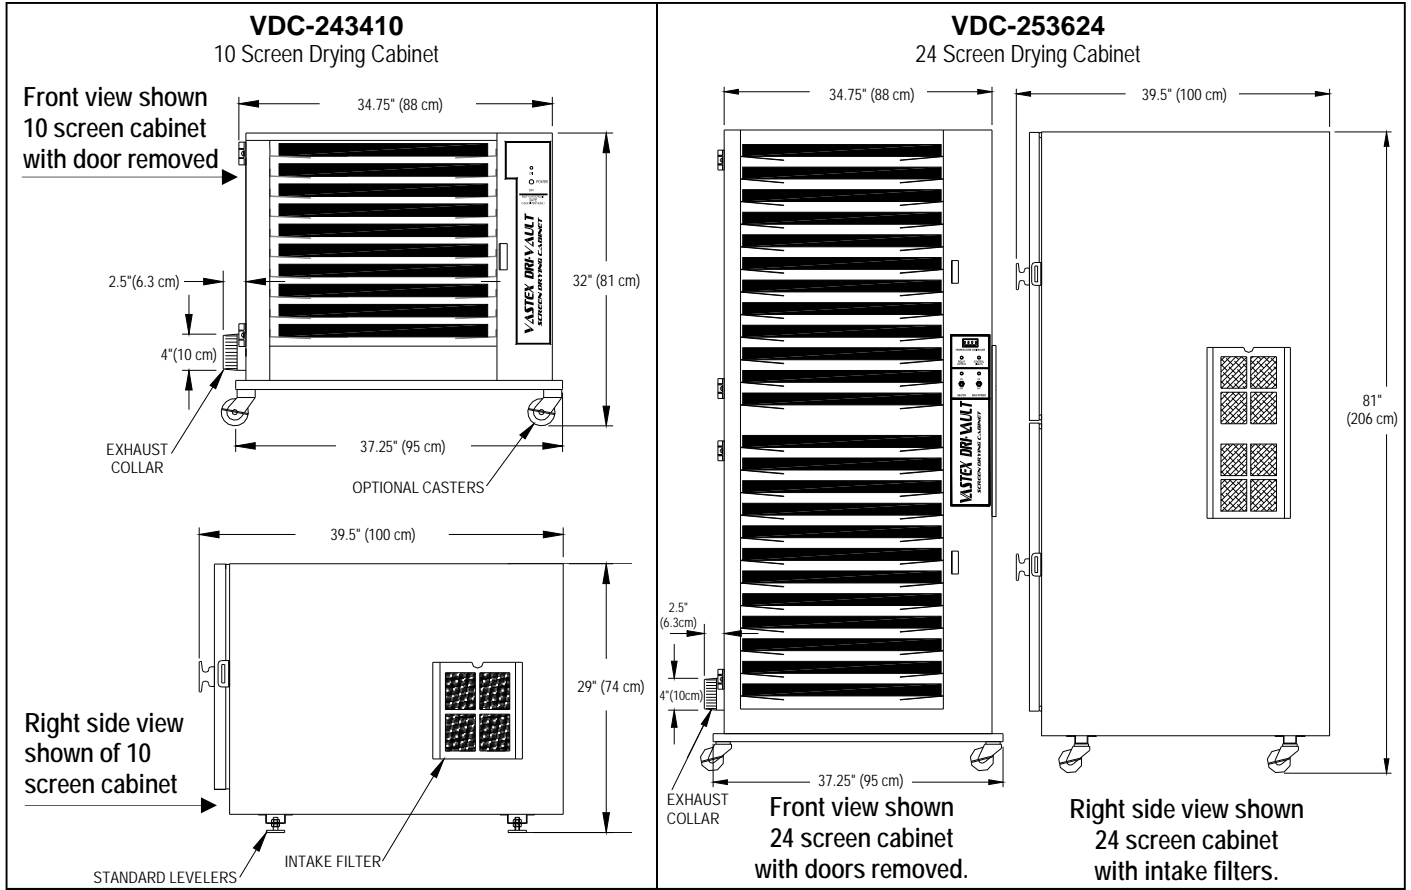

|                              | <b>VDC-253610</b>   | <b>VDC-253624</b>                                      |
|------------------------------|---|--|
| <b>Defect Warranty</b>       | <b>3 Year</b>   | <b>3 Year</b>  |
| <b>Maximum # of Screens</b>  | <b>10 @ maximum size</b>  | <b>24 @ maximum size</b>                               |
| <b>Maximum Screen Size**</b> | <b>25" x 36" x 1.625" (63.5 x 91.4 x 4.12 cm)</b>   | <b>25" x 36" x 1.625" (63.5 x 91.4 x 4.12 cm)</b>      |
| <b>Smallest Screen Width</b> | <b>18" (46 cm)</b>  | <b>18" (46 cm)</b>                                     |
| <b>Blower (Free Air)</b>     | <b>200 CFM (5.7 cmm) 120v OR 290 CFM (8.5cmm) 240volt</b>   | <b>580 CFM (17 CMM)</b>                                |
| <b>Overall Depth</b>         | <b>39.5" (100 cm)</b>   | <b>39.5" (100 cm)</b>                                  |
| <b>Overall Width</b>         | <b>34.75" (88 cm)</b>   | <b>34.75" (88 cm)</b>                                  |
| <b>Overall Height</b>        | <b>29" (74 cm) / 32" (81 cm) w/ optional casters</b>  | <b>81" (206 cm)</b>                                    |
| <b>Heater Wattage</b>        | <b>1,250 Watts 120 Volts or<br/>1,550 Watts 240 Volts</b>   | <b>2 x 1,550 = 3,100 Watts 240 Volts</b>               |
| <b>Electrical Power</b>      | <b>120V / 10A / 1 Ph. / 60 HZ / NEMA 5-15P plug or<br/>240V / 6A / 1 Ph. / 50/60 HZ / NEMA 6-15P plug</b> | <b>240V / 16A / 1 Ph. / 50/60 HZ / NEMA 6-20P plug</b> |
| <b>Shipping Weight*</b>      | <b>305 lbs (138.3 kg)</b>   | <b>668 lbs (303 kg)</b>                                |
| <b>Shipping Dimensions*</b>  | <b>45" x 43" x 36" [114 x 109 x 91 cm]</b>  | <b>44" x 44" x 82" [112 x 112 x 208 cm]</b>            |

\*All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications. Ex-works from Allentown PA.

\*\*Although taller frames may fit, airflow and cure times may be greatly diminished.



Toll Free: 1.800.482.7839  
1.800.4VASTEX