

# FORCED-AIR FLASH CURE UNIT

## AIR-FLASH



### AIR-FLASH 18

18 x 18 (45.7cm) infrared heater  
 2000 watt 120V **\$1035.00\***  
 3500 watt H.O. 240V **\$1085.00\***



### AIR-FLASH 1824

18 x 24 infrared heater  
 4300 watt H.O. 240 volt.  
 with standard floor stand **\$1245.00\***  
 with optional SHHD stand **\$1395.00\***  
 Add \$985.00 for auto upgrade (shown)

Both shown with optional **SHHD** floor stand.

**10 YEAR HEATER WARRANTY**

**“Our new Air-Flash delivers the power and versatility needed in today's demanding screen printing industry”**

A 140 CFM blower draws air through an oversized filtered intake, sends it through an air diverter, then distributes it evenly across the entire heater face. The heat and air flow are both adjustable. Add an AutoFlash for the most versatile flash cure in the industry!

### Detailed Features:

- RELIABLE 10 Year Heater Warranty
- POWERFUL Choose the standard 120V (18 x 18) 2000 watt heater or the High Output (H.O.) 3500 watt (18 x 18) or 4300 watt (18 x 24) heater
- VERSATILE Use air only, full heat and air, or modulate air velocity and heat hi-low. Works great with plastisol, water base, delicate garments, even discharge, and so much more
- SMART Unique heat shield helps to maintain temperature close to the edges of the heater
- CLEAN Large filtered air intake delivers clean air to heater
- ADJUSTABLE Heat, air velocity, heat shield, head height and level
- EFFICIENT Air cooled outer skin and side handles
- FAST High Output 240V (H.O.) heaters can flash plastisol in as little as 4 seconds, the 120V in 7-10 seconds
- USER FRIENDLY Diagnostic pilot lights
- CONVENIENT Heavy duty side handles & locking casters


### Options

- Super heavy duty stand, SHHD, as seen above, add \$150.00
- Auto-Flash upgrade for automatic head swing with gear motor, foot pedal & automatic timer, add \$985.00\*

\*Starting List Price (USD). Price does **NOT** include crating and shipping charges. 6% sales tax will be added for PA billing addresses. Prices subject to change without notice.



# Vastex Air-Flash Technical Specifications

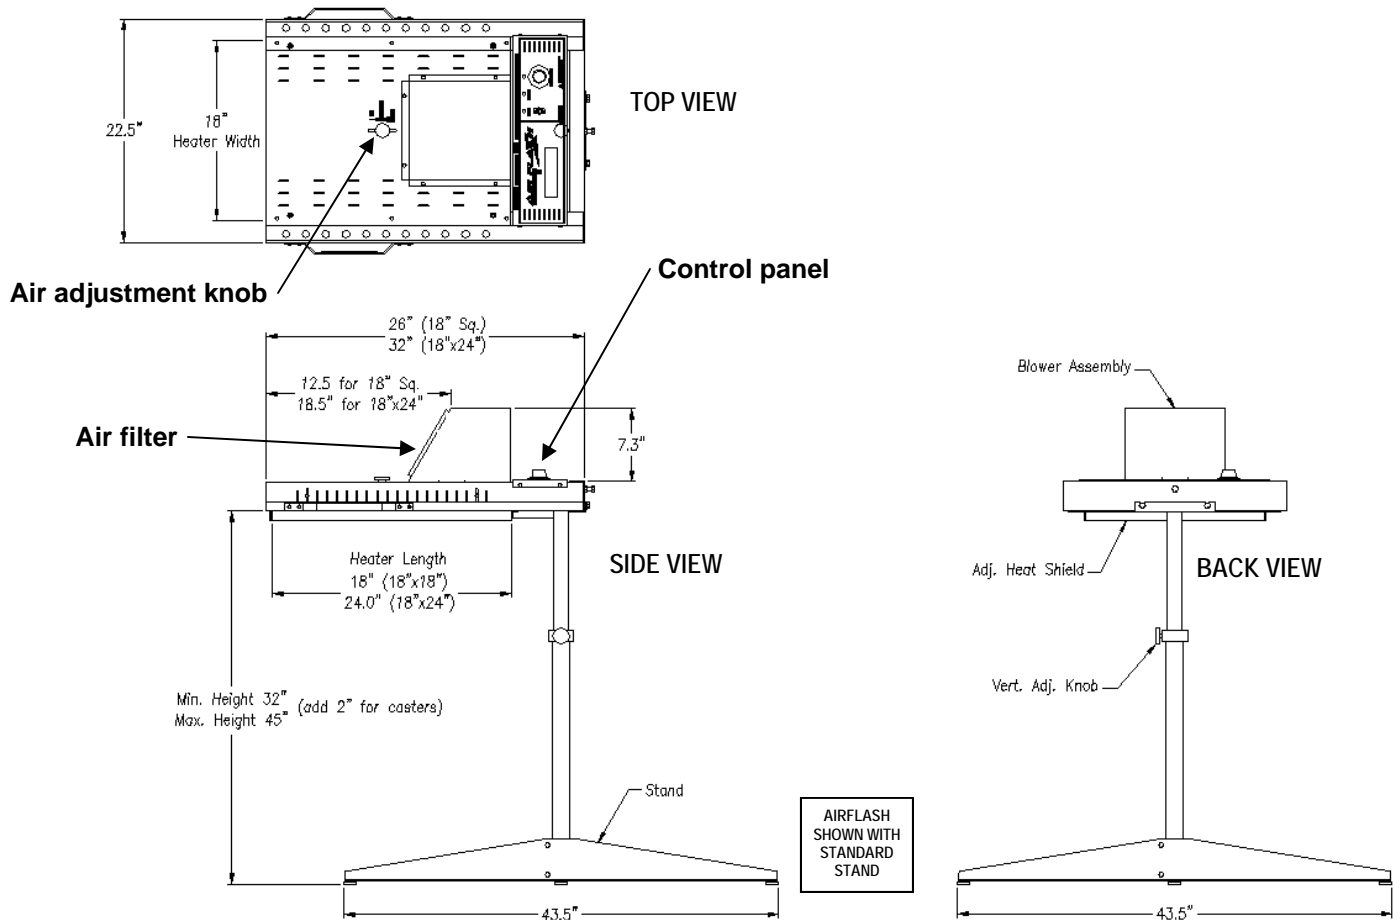

CE TUV-ISO 9001-2000 Compliant

<b>AIR-FLASH</b>			
Models	AIR-FLASH 18 (120V)	AIR-FLASH 18 (240V H.O.)	AIR-FLASH (1824 H.O.)
Heater Warranty	10 Year	10 Year	10 Year
Bumper to Bumper Warranty	3 Year	3 Year	3 Year
Heater Size	18 x 18" (46 x 46 cm)	18 x 18" (46 x 46 cm)	18 x 24" (46 x 61 cm)
Blower Specs	140 CFM / 120 volt	140 CFM / 240 volt	140 CFM / 240 volt
Unit Warm Up Time	12-18 min.	6-10 min.	6-10 min.
Heater Wattage (H.O. = High Output)	2000	3500 H.O.	4300 H.O.
Electrical Specs* (Requires dedicated outlet for all units.)	120 volt / 16.5 amp (requires 20 amp outlet)	240 volt / 16 amp (requires 20 amp outlet)	240 volt / 19 amp (requires 30 amp outlet)
Cord length and type	8' (2.43m) / NEMA 5-20P Plug	6' (1.82m) / NEMA 6-20P Plug	8' (2.43m) / NEMA L6-30P Plug
Head** Shipping Weight	TBA	TBA	TBA
Head** Shipping Dimensions	TBA	TBA	TBA
Legs** Shipping Weight (std. stand)	22 lbs (10 kg)		
Legs** Shipping Dimensions (std. stand)	37 x 7 x 3" (93 x 17 x 7 cm)		
SHHD stand** Shipping Weight (2 packages)	38 lbs (17 kg) and 10 lbs (4.5 kg)		
SHHD stand** Shipping Dimensions (2 pkgs)	29 x 32 x 4" (74 x 81 x 10 cm) and 32 x 9 x 4" (81 x 23 x 10 cm)		

\*Caution!! - If extension cord is needed, it must be sized with the amp draw of the flash and cord length considered, please consult a licensed electrician.

\*\*All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications.



Toll Free: 1.800.482.7839  
 1.800.4VASTEX

Red&F-Flash\_0510