



# FLASH CURE UNITS F-SERIES

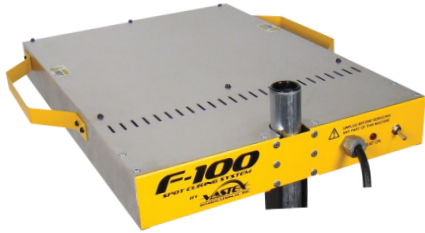

**F-100**  
16" x 16" Heater  
On/off power switch  
Includes levelers

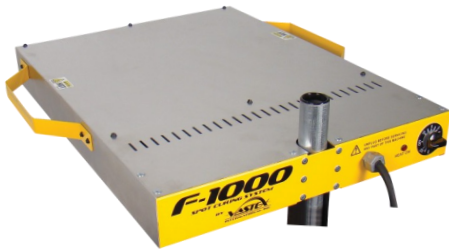

**F-1000**  
18" x 18" Heater  
Heat control  
Includes wheels

High wattage and close coil density heater, for greater heater surface consistency.

Great heaters along with our built in heat shields allows Vastex flashes to be set closer to your garment, which increases efficiency and productivity.



**15 YEAR  
HEATER WARRANTY**

**F-1000**  
Shown with standard stand



## F-100

CE Certified

## F-1000

16" x 16" (41 x 41cm)  
1,625w @ 120v or 240v  
NEMA 5-15P or 6-15P\*

Heater Size  
Power (Wattage)  
Power Plug

18" x 18" (46 x 46cm)  
1,950w @ 120v or 240v  
NEMA 5-20P or 6-15P\*

## F-100

15 Year Heater Warranty  
1,625 Watt IR Heater  
On/off power switch  
Heavy duty side handles  
Head leveler to adjust the heater parallel to the pallet  
Heat shields for even heater temperature

## Features

**RELIABLE**  
**POWERFUL**  
**USER FRIENDLY**  
**CONVENIENT**  
**UNIQUE**  
**SMART**

## F-1000

15 Year Heater Warranty  
1,950 Watt IR Heater  
Heat control with power lights  
Heavy duty side handles and locking wheels  
Head leveler to adjust the heater parallel to the pallet  
Heat shields for even heater temperature

## Options



AutoFlash

Wheel Set for F-100

Rotary Table



\*Domestic plugs listed. International cords available.



# Flash Cure Units

## Technical Specifications



TUV-ISO 9001-2000  
Compliant

	F-100	F-1000	REDFLASH		AIR-FLASH	
Models	F-100	F-1000	R-18-240	R-1824-240	RA-18-HO	RA-1824
Heater Warranty	15 Year	15 Year	15 Year	15 Year	15 Year	15 Year
Bumper to Bumper Warranty	3 Year	3 Year	3 Year	3 Year	3 Year	3 Year
Heater Size	16" x 16" (41 x 41 cm)	18" x 18" (46 x 46 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)
Unit Warm Up Time	15 min. (120V) or 10 min. (240V)	20 min. (120V) or 10 min (240V)	6 min.	12 min.	6-10 min	6-10 min
Heater Wattage	1625 Watt Heater	1950 Watt Heater	2600 or 3500 Watt Heater	3500 Watt Heater	3500 Watt Heater	4300 Watt Heater
Electrical Specs* / included plug (Some models require a dedicated line. 50/60 HZ for all units.)	120V/13A/1625W NEMA 5-15P  240V/6.5A/1625W NEMA 6-15-P	120V/15.6/1950W NEMA 5-20P  240V/7.8A/1950W NEMA 6-15-P	240V/9A/2600W NEMA 6-15P  240V/16A/3500W NEMA 6-20P	240V/16A/3500W/ NEMA 6-20P Plug	240V/16A/2500W NEMA 6-10P	240V/19A/4300W/ NEMA L6-30P
Electrical Specs - AutoFlash / included plug	110-125V/1A/NEMA 5-15P  220-240V/1A/NEMA 6-15P					

## Shipping Weights and Dimensions

	Weight**	Dimensions**
F-100 (Head and Stand)	39 lbs (18 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
F-1000 (Head and Stand)	42 lbs (19 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
R-18-240 (Head Only)	35 lbs (16 kg)	26" x 29" x 7" (66 x 74 x 18 cm)
R-1824-240 (Head Only)	43 lbs (19.5 kg)	26" x 35" x 8" (66 x 90 x 20 cm)
RA-18-HO (Head Only)	64 lbs (29 kg)	29" x 26" x 15" (74 x 66 x 38 cm)
RA-1824 (Head Only)	74 lbs (35.5 kg)	35" x 29" x 15" (89 x 74 x 38 cm)
AF-120/AF-240 AutoFlash kit	51 lbs (25 kg)	31" x 22" x 14" (79 x 56 x 36 cm)
SH-STAND-WS Standard Stand for Manual Flash	22 lbs (10 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND-M Heavy Duty Stand for Manual Flash	42 lbs (19kg)	30" x 14" x 7" (76 x 35.5 x 18 cm)
SH-LEGS-AF Standard Stand for AutoFlash	15 lbs (7 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND Heavy Duty Stand for AutoFlash	39 lbs (18 kg)	30" x 15" x 11" (76 x 38 x 28 cm)

NORTH AMERICAN POWER PLUG CONFIGURATION		
RECEPTACLE		PLUG
	120V	
	240V	

\*If extension cord is required, consult a licensed electrician.

\*\*All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications.

1 in = 2.54 cm  
1 lb = 0.454 kg

